


OIL YELLER™

Heating Oil Leak Detection System For Indoor Tanks, Filters and Burner Applications

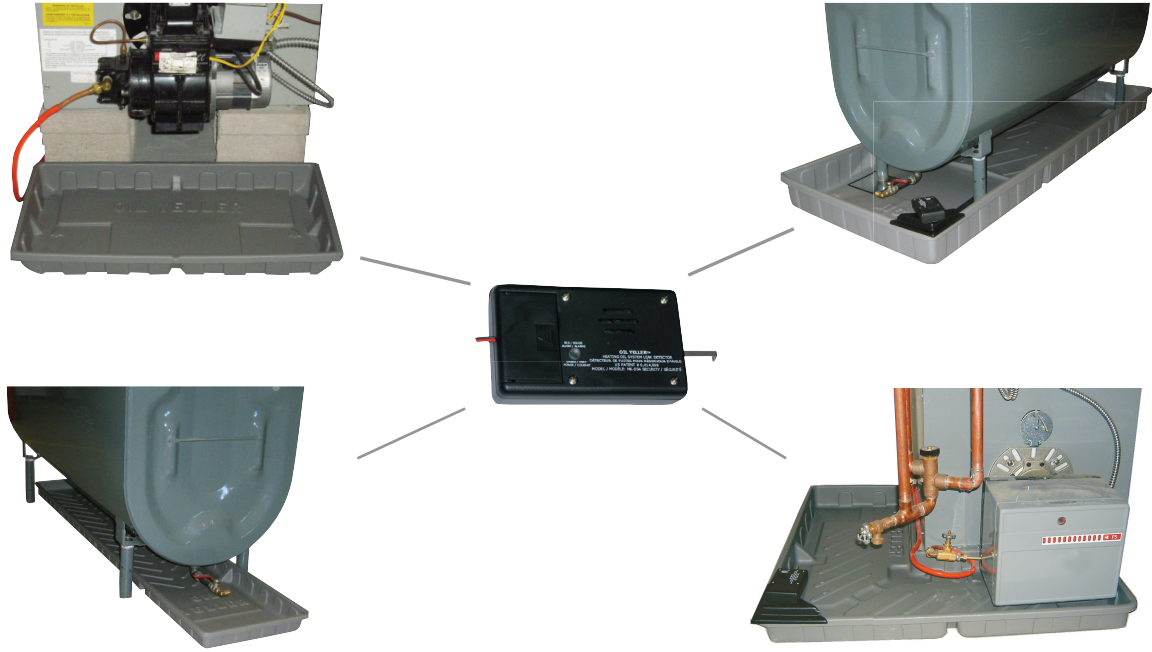

STANDARD FEATURES OF OIL YELLER TRAYS

- Promotes clean and safe heating oil storage.
- Designed to capture leaks from tank, filter, burner fittings or overflow situation.
- Designed to protect environment during annual filter replacement. No drips on the floor.
- Material: Oil Resistant High Density Polyethylene
- Two styles of tank trays available. Wide trays for new tank installations. Narrow trays for retrofitting existing tanks. (See reverse for details)
- All tank trays extend approximately 1ft (30 cm) beyond tank to accommodate filter and valve connections.
- L-Shape Burner Tray fits under burner and around furnace or boiler. Simply slides in place.
- Rectangular Filter Tray fits under filter and/or burner applications.
- Embossed contour design for quick alarm trigger.
- Prevents common leaks and spills from damaging the home or business environment.

ALARM FEATURES

- Two models to choose from.
- Provides leak detection alarming.
- Trips immediately with the presence of pooled oil.
- Velcro mounted for easy installation.
- Pulsating 85 db alarm. (every 10 seconds)
- Typical 9 volt battery performance 3 years. (10 years lithium)
- Low battery warning alarm.
- Easy self check design.
- Reliable spring loaded float design.
- Standard connections provided for security systems allowing for 24 hour external monitoring of your entire oil system. (Model MK-004)
- US Patent #6,414,598
- Approved for Can/CSA. C22.2 No. 205
- ANSI/UL Std no. 464 (Alarming appliance)
- Five year warranty on trays and alarms.
- Recommended protection by Insurers and Fire Marshals.



For information contact:

VistaStar
Toll Free 1-866-645-5325
Direct 1-902-462-2643
Fax 1-902-462-1384
Email: sales@oilyeller.com

Web Site: www.oilyeller.com

SPECIFICATIONS

PA-001 & PA-003 WIDE TRAY

FOR NEW INSTALLATIONS OF 275 AND 330 GALLON STEEL OR FIBERGLASS TANKS



APPLICATION:	All UL80 275 US Gallon or 330 US Gallon Tanks installed in tray	
TRAY TYPE:	PA-001 (275 Gal. tank)	PA-003 (330 Gal. tank)
LENGTH:	72 inches	84 inches
WIDTH:	27 inches	30 inches
HEIGHT:	5 inches	5 inches

Approximate quantity of oil required to trigger alarm: 2 US Gallons 3 US Gallons
CONTAINMENT CAPACITY: 42 US Gallons 54 US Gallons
Note: tank installed in tray, use BP-002 galvanized steel plates and gasket set to protect tray surface.

PA-004 NARROW TRAY

FOR RETROFITTING EXISTING STEEL TANKS



APPLICATION:	All UL80 275 US Gallon tanks or 330 US Gallon tanks	
TRAY TYPE:	PA-004	
LENGTH:	72 inches	
WIDTH:	17.25 inches	
HEIGHT:	2.75 inches	

Approximate quantity of oil required to trigger alarm: **0.5 US Gallons**
CONTAINMENT CAPACITY: **13 US Gallons**
*Note: Trays designed to slide under tank between legs. Tank does not require lifting.
Note: 1 foot Extension bracket (EB-004) available for 330 US Gallon tanks.*

PA-005 L SHAPED BURNER TRAY

PROTECTION FOR BURNER, FILTER AND CONNECTION LEAKS



APPLICATION:	Fits under burners and filters.
SIDE LENGTH:	31 inches
SIDE WIDTH:	13 inches
HEIGHT:	2.75 inches

Approximate quantity of oil required to trigger alarm: **0.4 US Gallons**
CONTAINMENT CAPACITY: **5.8 US Gallons**

PA-008 RECTANGULAR FILTER TRAY

PROTECTION FOR BURNER AND/OR FILTER LEAKS



APPLICATION:	Fits under burner and/or filter area.
SIDE LENGTH:	24 inches
SIDE WIDTH:	13 inches
HEIGHT:	2.75 inches

Approximate quantity of oil required to trigger alarm: **0.25 US Gallons**
CONTAINMENT CAPACITY: **2.8 US Gallons**

LEAK DETECTION


ELECTRONIC ALARMS BATTERY OR SECURITY



TWO ALARM MODELS AVAILABLE:	
MODEL MK-003	Part A-003 - 9 volt battery operated alarm
MODEL MK-004	Part A-004 - security connection provided (no/com/nc/+/-)
INCLUDES:	Mounting Bracket, Float, Hangers, 9 volt Battery
APPLICABLE REQUIREMENTS:	CAN/CSA - C22.2 No. 205 - Signal Equipment ANSI/UL - Std. No. 464 - Audible Signal Appliance

BP-002 INSTALL KIT

GALVANIZED STEEL PLATE AND GASKET SET



APPLICATION:	Required for PA-001 and PA-003 trays to protect the tray surface from tank leg damage.	
STEEL PLATES: (4)	20 gauge - 5.625" x 5.625"	
NEOPRENE GASKETS (4)	0.0625" x 6" x 6"	

EB-004 - EXTENSION BRACKET

APPLICATION:	Allows a PA-004 tray to be extended to fit under a 330 US Gallon tank
MATERIAL:	High Density Polyethylene

**Leak Detection For Your Entire Oil Storage System
Call Toll Free 1-866-645-5325**