
OIL YELLER[™]

Heating Oil Leak Detection System For Indoor Tanks, Filters and Burner Applications

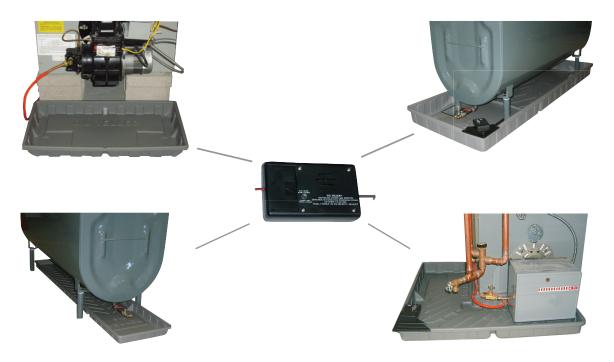

STANDARD FEATURES OF OIL YELLER TRAYS

- Promotes clean and safe heating oil storage.
- Designed to capture leaks from tank, filter, burner fittings or overfill situation.
- Designed to protect environment during annual filter replacement. No drips on the floor.
- Material: Oil Resistant High Density Polyethylene
- Two styles of tank trays available. Wide trays for new tank installations. Narrow trays for retrofitting
 existing tanks. (See reverse for details)
- All tank trays extend approximately 1ft (30 cm) beyond tank to accommodate filter and valve connections.
- L-Shape Burner Tray fits under burner and around furnace or boiler. Simply slides in place.
- Rectangular Filter Tray fits under filter and/or burner applications.
- Embossed contour design for quick alarm trigger.
- Prevents common leaks and spills from damaging the home or business environment.


ALARM FEATURES

- Two models to choose from.
- Provides leak detection alarming.
- Trips immediately with the presence of pooled oil.
- Velcro mounted for easy installation.
- Pulsating 85 db alarm. (every 10 seconds)
- Typical 9 volt battery performance 3 years. (10 years lithium)
- Low battery warning alarm.
- Easy self check design.
- Reliable spring loaded float design.
- Standard connections provided for security systems allowing for 24 hour external monitoring of your entire oil system. (Model MK-004)
- US Patent # 6,414,598 / Cdn Patent # 2,292,901 Approved for Can/CSA. C22.2 No. 205 ANSI/UL Std no. 464 (Alarming appliance)
- Five year warranty on trays and alarms.
- Recommended protection by Insurers and Fire Marshals.

For information contact: VistaStar

Toll Free 1-866-645-5325 Direct 1-902-462-2643 Fax 1-902-462-1384 Email: sales@oilyeller.com

On Guard For You!



PA-001 & **PA-003** WIDE TRAY

FOR NEW **INSTALLATIONS** OF 200 AND 250 GALLON STEEL TANKS

PA-002 or **PA-004** NARROW TRAY

FOR RETROFITTING **EXISTING STEEL TANKS**

PA-005 L SHAPED **BURNER TRAY**

PROTECTION FOR **BURNER, FILTER AND** CONNECTION LEAKS

PA-008 RECTANGULAR FILTER TRAY

PROTECTION FOR **BURNER AND/OR** FILTER LEAKS

LEAK DETECTION

ELECTRONIC ALARMS **BATTERY OR SECURITY**

BP-002 INSTALL KIT

GALVANIZED STEEL PLATE AND GASKET SET FOR PA-001 AND PA-003 **INSTALLATIONS**













CANADIAN SPECIFICATIONS

APPLICATION:

TRAY TYPE: LENGTH: WIDTH: HEIGHT: Approximate quantity of oil required to trigger alarm: CONTAINMENT CAPACITY:

200 Imperial Gallon (909 liters) or 250 Imperial Gallon (1136 liters) Tanks installed in tray

PA-001 (909 liter tank) 72 inches (183 cm) 27 inches (68.5 cm) 5 inches (12.7 cm)

PA-003 (1136 liter tank) 84 inches (213.2 cm) 30 inches (76.1 cm) 5 inches (12.7 cm)

1.6 lmp. Gallon (7.5 liters) 2.4 Imp. Gallon (10 liters) 33 Imp. Gallon (150 liters) 43 lmp. Gallon (195 liters) Note: tank installed in tray, use BP-002 galvanized steel plates and gasket set to protect tray surface.

APPLICATION:

TRAY TYPE: LENGTH: WIDTH: HEIGHT: Approximate quantity of oil required to trigger alarm: CONTAINMENT CAPACITY: 200 Imperial Gallon (909 liters) tanks or 250 Imperial Gallon (1136 liters) tanks with EB-002 PA-002 PA-004 72 inches (183 cm) 72 inches (183 cm) 14.5 (36.8 cm) 17.25 inches (43.8 cm) 2.75 inches (7.0 cm) 2.75 inches (7.0 cm)

2 liters

49 liters

2 liters 30 liters

Note: Trays designed to slide under tank between legs. Tank does not require lifting. Note: 1 foot (30.5 cm) Extension bracket (EB-002) available for 250 Imperial Gallon (1136 liter) tanks. Note: PA-004 used for UL80 Style Tanks or Tanks with Angled Legs.

APPLICATION:

APPLICATION:

SIDE LENGTH:

SIDE WIDTH:

HEIGHT:

SIDE LENGTH: SIDE WIDTH: HEIGHT: Approximate quantity of oil required to trigger alarm: CONTAINMENT CAPACITY: 22 liters

Fits under burners and filters. 31 inches (78.6 cm) 13 inches (32.8 cm) 2.75 inches (7.0 cm)

1.5 liters

Fits under burner and/or filter area. 24 inches (61 cm) 13 inches (32 cm) 2.75 inches (7.0 cm) Approximate quantity of oil

required to trigger alarm: 1 liter CONTAINMENT CAPACITY: 10.75 liters

TWO ALARM MODELS AVAILABLE.

TWO ALARIW WODELS AVAILABLE.	
MODEL MK-003	Part A-003 - 9 volt battery operated alarm
MODEL MK-004	Part A-004 - security connection provided (no/com/nc/+/-)
INCLUDES:	Mounting Bracket, Float, Hangers, 9 volt Battery
APPLICABLE	CAN/CSA - C22.2 No. 205 - Signal Equipment
REQUIREMENTS:	ANSI/UL - Std. No. 464 - Audible Signal Appliance
APPLICATION:	Required for PA-001 and PA-003 trays to protect the tray
	surface from tank leg damage.
STEEL PLATES: (4)	20 gauge - 5.625" x 5.625" (14.28 x 14.28) cm
NEOPRENE GASKETS (4)	0.0625" x 6" x 6" (0.15 x 15.24 x 15.24) cm

EB-002 - EXTENSION BRACKET

MATERIAL:

APPLICATION:

Allows a PA-002 tray to be extended to fit under a 250 Imp Gallon (1136 liter) tank **High Density Polyethylene**

Leak Detection For Your Entire Oil Storage System Call Toll Free 1-866-645-5325