

# OIL YELLER

## Heating Oil Leak Detection System For Indoor Tanks, Filters and Burner Trays



**A-004**



**PA-010**

### STANDARD FEATURES OF OIL YELLER TRAYS

- ◆ Promotes clean and safe heating oil storage.
- ◆ Designed to capture leaks from tank, filter, burner fittings or overflow situation.
- ◆ Designed to protect environment during annual filter replacement. No drips on the floor.
- ◆ Material: oil resistant high density polyethylene.
- ◆ Two styles of tank trays available, wide trays for new tank installations and narrow trays for retrofitting existing tanks (specs on reverse).
- ◆ We produce trays for every tank type. See our product selection guide at [www.oilyeller.com](http://www.oilyeller.com) for your application.
- ◆ L-Shape Burner & Filter Tray (PA-005) fits under burner and around furnace or boiler and simply slides in place.
- ◆ Prevents common leaks and spills from damaging the home or business environment.



**PA-002/PA-004**




**PA-007**

### LEAK DETECTION ALARM FEATURES



**PA-008**

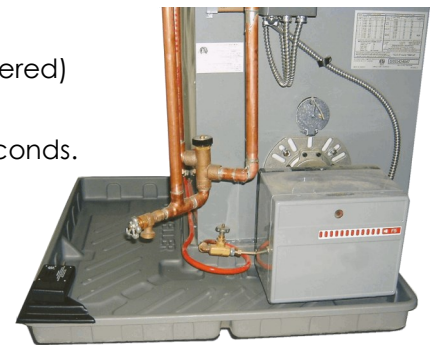


**PA-005**



**PA-009**

- ◆ Two patented alarm models to choose from: A-003 (9V battery powered) or A-004 (security system hard wire).
- ◆ Provides leak detection alarming, pulsating 85 dB alarm every 10 seconds.
  - ◆ Velcro mounted for easy installation.
  - ◆ Typical 9V alkaline battery performance ~ 3 years.
  - ◆ Low battery warning alarm.
  - ◆ Reliable spring loaded float design.
- ◆ Standard connections provided for security systems, allowing for 24 hour external monitoring of your entire oil system (Model A-004 alarm).
- ◆ US Patent #6,414,598 / CDN Patent # 2,292,901. Test Standard No. 205. ANSI/UL Std. # 464 (alarming appliance).
- ◆ Five year warranty on trays and alarms.
- ◆ Recommended protection by Insurers and Fire Marshals.



Vistastar Distributors  
Toll Free: 1-866-OIL-LEAK  
(1-866-645-5325)  
Direct: 1-902-462-2643  
Fax: 1-902-462-1384  
Email: [sales@oilyeller.com](mailto:sales@oilyeller.com)

WEB SITE:  
[www.oilyeller.com](http://www.oilyeller.com)




**PA-001/PA-003**

# PRODUCT SPECIFICATIONS



## EB-004 EXTENSION BRACKET

Allows a PA-004 tray to be extended to fit beneath a standard 330

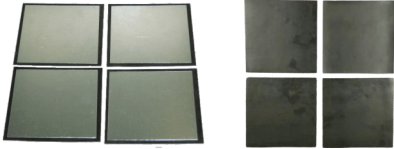

## BP-002 INSTALL KITS & NG-002 GASKETS

BP-002 required for PA-001, PA-003, PA-007, PA-009 and PA-010 installations when installing steel tanks with nipple legs. Pipe flange footings require only NG-002 gaskets. (Kits/gaskets not required for fiberglass tanks)



## PA-005 L-SHAPED BURNER & FILTER TRAY

DIMENSIONS (L x W x H):  
31" x 31" x 2 3/4"

QTY TO TRIGGER ALARM:  
0.4 US Gal

CONTAINMENT CAPACITY:  
5.8 US Gal



## PA-008 RECTANGULAR BURNER & FILTER TRAY

DIMENSIONS (L x W x H):  
24" x 13" x 2 3/4"

QTY TO TRIGGER ALARM:  
0.26 US Gal

CONTAINMENT CAPACITY:  
2.84 US Gal



## PA-001/PA-003 WIDE TRAY

DIMENSIONS (L x W x H):  
72" x 27" x 5" (PA-001)  
84" x 30" x 5" (PA-003)

QTY TO TRIGGER ALARM:  
2.0 US Gal (PA-001)  
2.6 US Gal (PA-003)

CONTAINMENT CAPACITY:  
41.5 US Gal (PA-001)  
51.5 US Gal (PA-003)



## PA-007 HORIZONTAL TANK TRAY

DIMENSIONS (L x W x H):  
49 7/8" x 70" x 3 7/16"

CONTAINMENT CAPACITY:  
41.5 US Gal



## PA-002/PA-004 NARROW TRAY

DIMENSIONS (L x W x H):  
72" x 14 1/2" x 2 3/4"  
(PA-002)  
72" x 17 1/4" x 2 3/4"  
(PA-004)

QTY TO TRIGGER ALARM:  
0.53 US Gal (Both)

CONTAINMENT CAPACITY:  
7.9 US Gal (PA-002)  
12.9 US Gal (PA-004)



## A-003 (9V BATTERY) / A-004 (HARD-WIRED) LEAK DETECTION ALARM

DIMENSIONS (L x W x H):  
4 1/2" x 2 3/4" x 1 1/4"

CAN/CSA—C22.2 No. 205  
Signal Equipment

ANSI/UL—Std. No. 464  
Audible Signal Appliance



## PA-009 LARGE RECTANGULAR TRAY

DIMENSIONS (L x W x H):  
52" x 34 7/16" x 3"

CONTAINMENT CAPACITY:  
19.0 US Gal



## PA-010 SQUARE TRAY

DIMENSIONS (L x W x H):  
35 1/4" x 35 1/4" x 3"

CONTAINMENT CAPACITY:  
12.65 US Gal

### PRODUCT APPLICATION GUIDE:

We have a product for every tank. To view the Product Selection Guide visit our website: [www.oilyeller.com](http://www.oilyeller.com)